


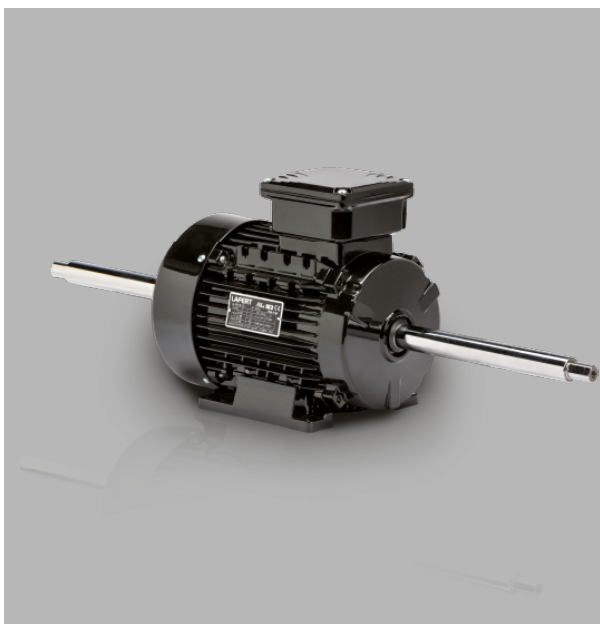

Brake Motors - IE3/IE2/IE1

STANDARD EFFICIENCY MOTORS - IE1

- Options make motors suitable for either onshore or offshore duties
- Engineered to give high performance with maximum efficiency
- Reliability & durability ensured through total control over component supply chains

IE1

UL

SE

CCC

TECHNICAL DATA

Motor Type

AMBZ 160L ZA8 - 7.5 kW - 8 poles - 400V - 50Hz

PERFORMANCE DATA

Type	AMBZ 160L ZA
Poles	8
kW	7.5
HP	10
rpm	710
Mn Nm	101
η 50%	86.3
η 75%	85.8
η 100%	85.5
cos Phi	0.74
I_N 400 V	17.1
I_N 380-400 V	17.8
I_A/I_N	4
M_A/M_N	1.8

M_K/M_N	2.3
J 10 ⁻³ kgm ²	139
Mb max Nm	150(250) ²)
zL ¹) c/h	1120
kg	142

Mechanical Data

Design	ALUMINIUM
Degree of protection	IP 55
Bearings DE/NDE	6309/2Z
Lubrication grease	low & high temperature grease
Regreasing device horizontal	permanent lubrication
Regreasing device vertical	permanent lubrication
Cooling	IC 411
Vibration Level	A (normal)
Noise Lpa db(A)	56

Electrical Data

Voltage	400V - 50Hz
Connection	?/Y 400/690V
Duty type	S1
Thermal protection	na
Insulation class	F
Direction of rotation	bidirectional
Ambient temperature	-20°C / +40 °C
Altitude	1000 m.a.s.l.