


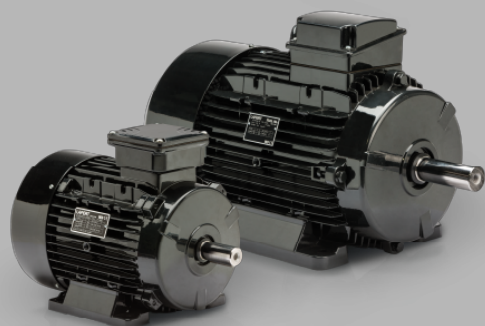

AC Three-phase Motors - IE4/IE3/IE2/IE1

PREMIUM EFFICIENCY MOTORS - IE3/CURUS

- IE3 Premium Efficiency compliant since 2010
- Total reliability and longevity in a well-engineered package
- Enhanced designs to meet today's challenges and market needs

IE3

ENERGY
CLASS C

UL US

UL US

SP

CCC

TECHNICAL DATA

Motor Type

AMPE 160M AA4 - 11 kW - 4 poles - 400V - 50Hz

PERFORMANCE DATA

Type	AMPE 160M AA
Poles	4
kW	11
HP	15
rpm	1475
Mn Nm	71.3
η 50%	91.6
η 75%	92.4
η 100%	91.4
cos Phi	0.83
I_N	21.0
I_A/I_N	8.2
M_A/M_N	2.1
M_S/M_N	1.7

M_K/M_N	2.8
J 10⁻³ kgm²	89.0
kg	100

Mechanical Data

Design	Aluminium
Degree of protection	IP 55
Bearings DE/NDE	6309/2Z
Lubrication grease	low & high temperature grease
Regreasing device horizontal	permanent lubrication
Regreasing device vertical	permanent lubrication
Grease Quantity	-
Cooling	IC 411
Vibration Level	A (normal)
Noise Lpa db(A)	62

Electrical Data

Voltage	400V - 50Hz
Connection	?/Y 400/690V
Duty type	S1
Thermal protection	na
Insulation class	F
Direction of rotation	bidirectional
Ambient temperature	-20°C / +40 °C
Altitude	1000 m.a.s.l.