


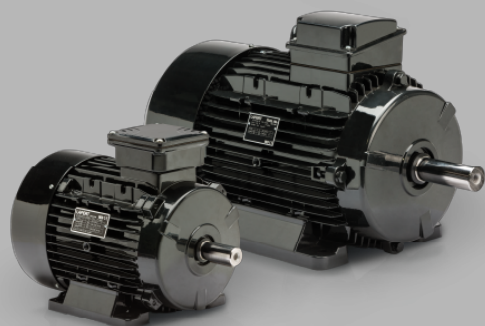

AC Three-phase Motors - IE4/IE3/IE2/IE1

PREMIUM EFFICIENCY MOTORS - IE3/CURUS

- IE3 Premium Efficiency compliant since 2010
- Total reliability and longevity in a well-engineered package
- Enhanced designs to meet today's challenges and market needs

IE3

ENERGY
CLASS
C

UL
C

UL
C

SP

CCC

TECHNICAL DATA

Motor Type

AMPH 112M AA2 - 3.7 kW - 2 poles - 460V - 60Hz

PERFORMANCE DATA

Type	AMPH 112M AA
Poles	2
kW	3.7
HP	5
rpm	3535
Mn Nm	10.0
η 50%	84.0
η 75%	87.6
η 100%	88.5
cos Phi	0.90
I_N	5.8
I_A/I_N	11.0
M_A/M_N	3.4
M_S/M_N	1.9

M_K/M_N	4.0
J 10⁻³ kgm²	6.5
kg	27.4

Mechanical Data

Design	Aluminium
Degree of protection	IP 55
Bearings DE/NDE	6306/2Z
Lubrication grease	low & high temperature grease
Regreasing device horizontal	permanent lubrication
Regreasing device vertical	permanent lubrication
Grease Quantity	-
Cooling	IC 411
Vibration Level	A (normal)
Noise Lpa db(A)	68

Electrical Data

Voltage	460V - 60Hz
Connection	YY/Y 230/460V - ? 460V
Duty type	S1
Thermal protection	na
Insulation class	F
Direction of rotation	bidirectional
Ambient temperature	-20°C / +40 °C
Altitude	1000 m.a.s.l.