


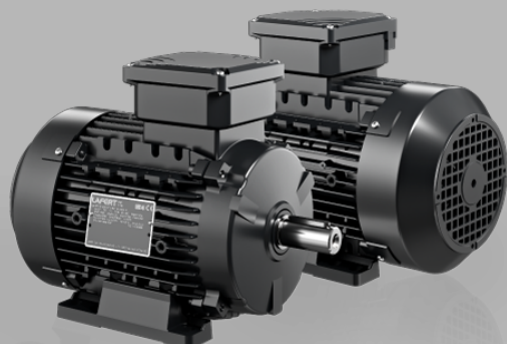

Motori Sincroni PM - IE6/IE5

MOTORI HYPER EFFICIENCY - IE6

- Rendimento IE6 Hyper Efficiency
- La rivoluzione nell'efficienza industriale
- Potenza, compattezza ed efficienza

IE6 

TECHNICAL DATA

Motor Type

IE6 HPS 56 3600 5 0.25 kW - 3600 rpm - 400V - 50Hz

PERFORMANCE DATA

Type	IE6 HPS 56 3600 5
Rated Speed rpm	3600
Rated Power kW	0.25
Rated Power HP	0.33
Rated Torque Nm	0.7
Peak torque Nm	2.0
Voltage constant Vs	0.73
Torque constant Nm/A	1.26
B.E.M.F. @ rated speed Vrs	272
Rated current Arms	0.5
Efficiency IE code	IE6
Efficiency η %	79.7
Weight Kg	3.0

Mechanical Data

Design	ALUMINIUM
Degree of protection	IP 55
Bearings DE	6202 2Z
Bearings NDE	6201 2Z
Lubrication grease	low & high temperature grease
Regreasing device	permanent lubrication
Cooling	IC 411
Vibration Level	A (normal)
Design	ALUMINIUM
Degree of protection	IP 55
Bearings DE	6202 2Z
Bearings NDE	6201 2Z
Lubrication grease	low & high temperature grease
Regreasing device	permanent lubrication
Cooling	IC 411
Vibration Level	A (normal)

Electrical Data

Supply Voltage	400V - 50Hz
Duty type	S1
Insulation class	F
Direction of rotation	bidirectional
Ambient temperature	-15°C / +40 °C
Altitude	1000 m.a.s.l.
Duty type	S1
Insulation class	F
Direction of rotation	bidirectional
Ambient temperature	-15°C / +40 °C
Altitude	1000 m.a.s.l.