




Motori Asincroni Trifase - IE4/IE3/IE2/IE1

MOTORI PREMIUM EFFICIENCY - IE3/CURUS

- Motori IE3 Premium Efficiency già dal 2010
- Affidabilità assoluta: solido, prestante, duraturo
- Infinite possibilità di personalizzazione per ogni esigenza applicativa

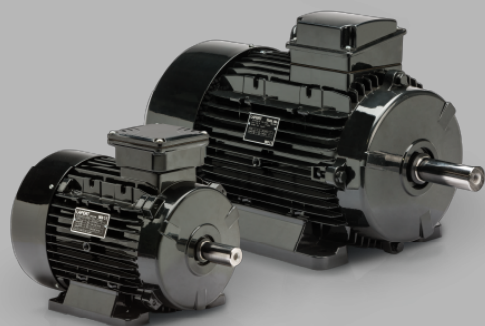

TECHNICAL DATA

Motor Type

AMPE 80Z XA4 - 0.55 kW - 4 poles - 400V - 50Hz

PERFORMANCE DATA

Type	AMPE 80Z XA
Poles	4
kW	0.55
HP	0.75
rpm	1440
Mn Nm	3.8
η 50%	75.6
η 75%	80.7
η 100%	80.8
cos Phi	0.75
I_N	1.3
I_A/I_N	6.0
M_A/M_N	2.8
M_S/M_N	2.5

M_K/M_N	2.6
J 10⁻³ kgm²	1.4
kg	8.2

Mechanical Data

Design	Aluminium
Degree of protection	IP 55
Bearings DE/NDE	6204/2Z
Lubrication grease	low & high temperature grease
Regreasing device horizontal	permanent lubrication
Regreasing device vertical	permanent lubrication
Grease Quantity	-
Cooling	IC 411
Vibration Level	A (normal)
Noise Lpa db(A)	48

Electrical Data

Voltage	400V - 50Hz
Connection	?/Y 230/400V
Duty type	S1
Thermal protection	na
Insulation class	F
Direction of rotation	bidirectional
Ambient temperature	-20°C / +40 °C
Altitude	1000 m.a.s.l.