




Motori Autofrenanti - IE3/IE2/IE1

MOTORI PREMIUM EFFICIENCY - IE3

- Completamente customizzabile anche per ambienti off shore
- Alta progettualità e prestazioni elevate
- Qualità totale con il controllo completo su tutti i componenti

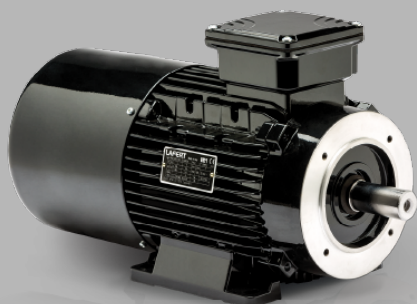

TECHNICAL DATA

Motor Type

AMPEBY 100L BA2 - 4 kW - 2 poles - 400V - 50Hz

PERFORMANCE DATA

Type	AMPEBY 100L BA
Poles	2
kW	4
HP	5.5
rpm	2920
Mn Nm	13.1
η 50%	85.4
η 75%	87.2
η 100%	88.1
cos Phi	0.81
I_N	8.2
I_A/I_N	10.9
M_A/M_N	6.1
M_K/M_N	5.7

J 10⁻³ kgm²	6.9
Mb max Nm	13
zL ¹⁾ c/h	900
kg	30.2

Mechanical Data

Design	ALUMINIUM
Degree of protection	IP 55
Bearings DE/NDE	6206/2Z
Lubrication grease	low & high temperature grease
Regreasing device horizontal	permanent lubrication
Regreasing device vertical	permanent lubrication
Cooling	IC 411
Vibration Level	A (normal)
Noise Lpa db(A)	66

Electrical Data

Voltage	400V - 50Hz
Connection	?/Y 230/400V or ?/Y 400/690V
Duty type	S1
Thermal protection	na
Insulation class	F
Direction of rotation	bidirectional
Ambient temperature	-20°C / +40 °C
Altitude	1000 m.a.s.l.