


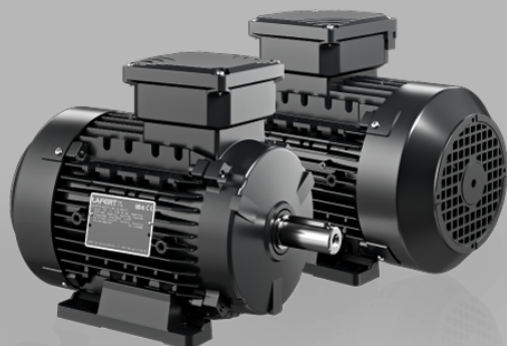

### Motori Sincroni PM - IE6/IE5

### MOTORI HYPER EFFICIENCY - IE6

- Rendimento IE6 Hyper Efficiency
- La rivoluzione nell'efficienza industriale
- Potenza, compattezza ed efficienza

**IE6** 

## TECHNICAL DATA

Motor Type

IE6 HPS 112 1800 116 5.5 kW - 1800 rpm - 400V - 50Hz

## PERFORMANCE DATA

| Type                       | IE6 HPS 112 1800 116 |
|----------------------------|----------------------|
| Rated Speed rpm            | 1800                 |
| Rated Power kW             | 5.5                  |
| Rated Power HP             | 7.5                  |
| Rated Torque Nm            | 29.2                 |
| Peak torque Nm             | 87.5                 |
| Voltage constant Vs        | 1.45                 |
| Torque constant Nm/A       | 2.5                  |
| B.E.M.F. @ rated speed Vrs | 272                  |
| Rated current Arms         | 11.6                 |
| Efficiency IE code         | IE6                  |
| Efficiency $\eta$ %        | 93.9                 |
| Weight Kg                  | 30                   |

# Mechanical Data

|                      |                               |
|----------------------|-------------------------------|
| Design               | ALUMINIUM                     |
| Degree of protection | IP 55                         |
| Bearings DE          | 6208 2Z                       |
| Bearings NDE         | 6306 2Z                       |
| Lubrication grease   | low & high temperature grease |
| Regreasing device    | permanent lubrication         |
| Cooling              | IC 411                        |
| Vibration Level      | A (normal)                    |
| Design               | ALUMINIUM                     |
| Degree of protection | IP 55                         |
| Bearings DE          | 6208 2Z                       |
| Bearings NDE         | 6306 2Z                       |
| Lubrication grease   | low & high temperature grease |
| Regreasing device    | permanent lubrication         |
| Cooling              | IC 411                        |
| Vibration Level      | A (normal)                    |

# Electrical Data

|                       |                |
|-----------------------|----------------|
| Supply Voltage        | 400V - 50Hz    |
| Duty type             | S1             |
| Insulation class      | F              |
| Direction of rotation | bidirectional  |
| Ambient temperature   | -15°C / +40 °C |
| Altitude              | 1000 m.a.s.l.  |
| Duty type             | S1             |
| Insulation class      | F              |
| Direction of rotation | bidirectional  |
| Ambient temperature   | -15°C / +40 °C |
| Altitude              | 1000 m.a.s.l.  |