


Motori Autofrenanti - IE3/IE2/IE1

MOTORI STANDARD EFFICIENCY - IE1

- Completamente customizzabile anche per ambienti off shore
- Alta progettualità e prestazioni elevate
- Qualità totale con il controllo completo su tutti i componenti

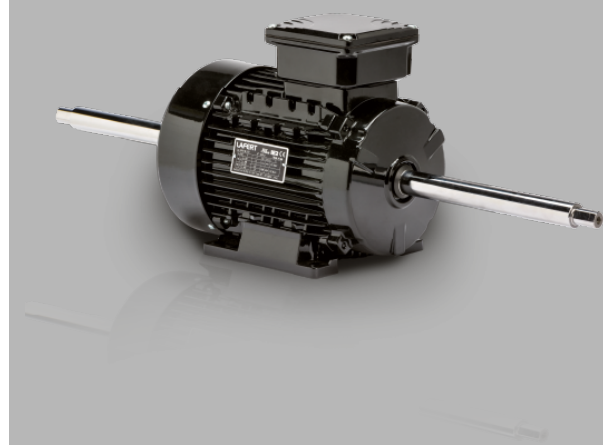

TECHNICAL DATA

Motor Type

AMBZ 100L AA8 - 0.75 kW - 8 poles - 400V - 50Hz

PERFORMANCE DATA

Type	AMBZ 100L AA
Poles	8
kW	0.75
HP	1
rpm	690
Mn Nm	10.4
η 50%	59
η 75%	64
η 100%	65
cos Phi	0.65
I_N 400 V	2.6
I_N 380-400 V	2.8
I_A/I_N	3
M_A/M_N	1.6

M_K/M_N	1.7
$J \cdot 10^{-3} \text{ kgm}^2$	6.7
$M_b \text{ max Nm}$	40(75) ²
$zL^{-1} \text{ c/h}$	7550
kg	26.9

Mechanical Data

Design	ALUMINIUM
Degree of protection	IP 55
Bearings DE/NDE	6206/2Z
Lubrication grease	low & high temperature grease
Regreasing device horizontal	permanent lubrication
Regreasing device vertical	permanent lubrication
Cooling	IC 411
Vibration Level	A (normal)
Noise Lpa db(A)	46

Electrical Data

Voltage	400V - 50Hz
Connection	?/Y 230/400V
Duty type	S1
Thermal protection	na
Insulation class	F
Direction of rotation	bidirectional
Ambient temperature	-20°C / +40 °C
Altitude	1000 m.a.s.l.