

BATTERY-POWERED SOLUTIONS

LOW VOLTAGE BRUSHLESS SERVO MOTORS
BATTERY-POWERED DRIVES



THE RANGE

Lafert offers a wide range of **Permanent Magnet Synchronous Servo Motors**. The Lafert range of servo motors grants precise engineering and superior performance. Thanks to its whole integrated manufacturing process, Lafert can supply standard and tailor-made products for Industrial Automation giving excellent flexibility and cost efficiency.



SOLUTIONS FOR BATTERY-POWERED APPLICATIONS

In the sector of **battery-powered automated handling of material and/or people** within industrial plants, Lafert can offer a wide range of products suitable for many of the different application requirements.

The assembly, made up of an **AC brushless servomotor with its own servo drive**, is the perfect solution for both performance and costs. Due to the motor's high efficiency, the control system is noiseless and has a dramatic reduction in emissions compared with traditional traction systems. The solutions proposed by


Lafert optimally meet, more and more, the majority of the market needs. The expertise and long experience in this sector allow Lafert to offer a high degree of flexibility and many customised solutions for this range of products, specifically designed for the battery-powered application field.

Lafert is present in the **AGV (Automated Guided Vehicle) sector** with solutions for applications ranging from lift trucks to automated equipment for industrial cleaning, up to hydraulic pumps.

Type	Square flange [mm]	Torque [Nm]	Rated speed [rpm]	Centring Diameter Ø [mm]	Diameter Coupling holes [mm]
B63I	116	4 to 10	2000 - 3000 - 4000 - 6000	Ø110j6	130
B71I	142	12 to 24	2000 - 2700	Ø130j6	165






TYPE B63I - B71I - 6 POLES



CONNECTION C3



CONNECTION C5

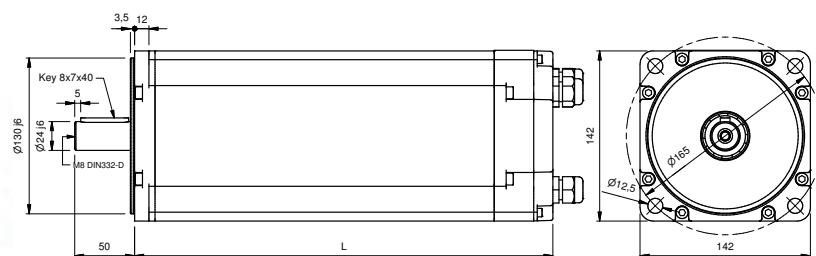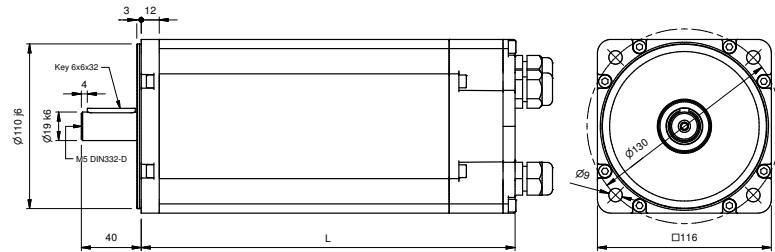

Connection type C5 available for all motor range. Connection type C3 available only for $I_0 < 66$ Arms upon request.

MECHANICAL DATA

Type	Torque Nm	Length with RESOLVER/ENCODER (L)		Weight Kg	
		Without brake	With brake	Without brake	With brake
B63.04I	4	225	254	7.4	8.7
B63.06I	6	250	279	8.5	9.8
B63.08I	8	275	304	9.2	10.7
B63.10I	10	300	329	10.1	11.6
B71.12I	12	274	314	16.3	18.8
B71.16I	16	299	339	20.5	23.0
B71.20I	20	324	364	23.6	26.1
B71.24I	24	349	389	26.0	28.5

BRAKE DATA

Brake data	Symbol	B63I	B71I	Unit
Holding torque 20°C	Mbr	9.5	27	Nm
Voltage	Ubr	24	24	Vdc +/- 10%
Resistance	Rbr	30.0	23.4	Ohm
Electrical Power	Pbr	19.2	24.6	W
Current	Ibr	0.8	1.03	Adc
Additional* Rotor Inertia	Jbr	3.6	9.50	kgcm ²
Opening (release) time	to max	80	110	ms
Closing (fall in) time	tc max	35	50	ms
Additional* Motor weight	mbr	1.0	2.5	kg

* Additional values are related to the motor data when the brake is mounted to the motor of the respective size, these values differ from the brake data in unmounted condition!

TYPE B63I - B71I - 6 POLES

**FOR MAINS VOLTAGE
48 - 96 V**

Type	Stall torque (Δt=105°C)	Rated speed	Output rated speed	Rated torque (Δt=105°C)	Peak torque	Maximum speed	Moment of inertia	Peak torque acceleration	Thermal time constant	Thermal protection threshold	Voltage constant	Torque constant	Resistance phase to phase (20°C)	Inductance phase to phase	B.E.M.F. at rated speed	Stall current	Rated current
	M _o Nm	n 1/min	P _n kW	M _n Nm	M _{pk} Nm	n _{max} rpm	J 10 ⁻⁴ Kgm ²	apk rad/sec ²	T _{th} min	θ _{max} °C	k _e Vs	k _t Nm/A	R _w Ω	L _w mH	E _n Vrms	I _o Arms	I _n Arms
2000 min⁻¹ - 48 Volt																	
B63.04I	4	2000	0.8	3.7	17.1	7200	6.10	29432	20	140	0.12	0.21	0.172	0.69	25	19.8	17.8
B63.06I	6	2000	1.2	5.5	24.4	7200	8.98	28538	30	140	0.12	0.21	0.088	0.48	25	29.1	26.5
B63.08I	8	2000	1.6	7.6	33.1	7200	11.76	29554	30	140	0.12	0.21	0.061	0.37	25	38.1	36.6
B63.10I	10	2000	2.0	9.4	40.5	7200	14.33	29670	35	140	0.12	0.21	0.041	0.28	25	49.5	45.2
3000 min⁻¹ - 48 Volt																	
B63.04I	4	3000	1.1	3.5	17.1	7200	6.10	29432	20	140	0.08	0.14	0.074	0.32	25	27.5	29.1
B63.06I	6	3000	1.7	5.3	24.4	7200	8.98	28538	30	140	0.08	0.14	0.045	0.24	25	41.4	38.2
B63.08I	8	3000	2.2	7.1	33.1	7200	11.76	29554	30	140	0.08	0.14	0.029	0.18	25	55.0	51.2
B63.10I	10	3000	2.8	8.8	40.5	7200	14.33	29670	35	140	0.08	0.14	0.015	0.10	25	82.5	63.5
4000 min⁻¹ - 48 Volt																	
B63.04I	4	4000	1.4	3.4	17.1	7200	6.10	29432	20	140	0.06	0.10	0.038	0.16	25	41.2	32.7
B63.06I	6	4000	2.1	5.1	24.4	7200	8.98	28538	30	140	0.06	0.10	0.020	0.11	25	61.9	49.1
B63.08I	8	4000	2.8	6.6	33.1	7200	11.76	29554	30	140	0.06	0.10	0.013	0.08	25	82.5	63.5
B63.10I	10	4000	3.4	8.1	40.5	7200	14.33	29670	35	140	0.06	0.10	0.010	0.07	25	99.0	77.9
6000 min⁻¹ - 48 Volt																	
B63.04I	4	6000	1.9	3.0	17.1	7200	6.10	29432	20	140	0.04	0.07	0.021	0.09	25	55.0	43.3
B63.06I	6	6000	2.9	4.6	24.4	7200	8.98	28538	30	140	0.04	0.07	0.011	0.06	25	82.5	66.4
B63.08I	8	6000	3.5	5.6	24.4	7200	11.76	28538	30	140	0.04	0.07	0.006	0.04	25	82.5	80.8
2000 min⁻¹ - 48 Volt																	
B71.12I	12	2000	2.3	11.0	48	7200	23.60	20339	45	140	0.12	0.21	0.027	0.13	25	58.4	52.9
B71.16I	16	2000	2.8	13.5	60	7200	31.53	19029	45	140	0.12	0.21	0.019	0.11	25	75.1	65.0
B71.20I	20	2000	3.4	16.0	80	7200	38.44	20812	50	140	0.12	0.21	0.011	0.07	25	105.1	77.0
B71.24I	24	2000	3.8	18.0	92	7200	45.35	20287	55	140	0.12	0.21	0.007	0.05	25	105.1	86.6
2700 min⁻¹ - 48 Volt																	
B71.12I	12	2700	3.0	10.5	48	7200	23.60	20339	45	140	0.09	0.16	0.017	0.08	28	75.1	67.4
B71.16I	16	2700	3.4	12.0	60	7200	31.53	19029	45	140	0.09	0.16	0.010	0.05	28	105.1	77.0
B71.20I	19	2700	3.8	13.5	80	7200	38.44	20812	50	140	0.09	0.16	0.007	0.04	28	124.9	86.6
2000 min⁻¹ - 96 Volt																	
B63.04I	4	2000	0.8	3.7	17.1	7200	6.10	29432	20	140	0.24	0.42	0.663	2.87	50	9.7	8.9
B63.06I	6	2000	1.2	5.5	24.4	7200	8.98	28538	30	140	0.24	0.42	0.331	1.80	50	15.0	13.2
B63.08I	8	2000	1.6	7.6	33.1	7200	11.76	29554	30	140	0.24	0.42	0.271	1.61	50	18.3	18.3
B63.10I	10	2000	2.0	9.4	40.5	7200	14.33	29670	35	140	0.24	0.42	0.174	1.22	50	23.6	22.6
3000 min⁻¹ - 96 Volt																	
B63.04I	4	3000	1.1	3.5	17.1	7200	6.10	29432	20	140	0.16	0.28	0.663	2.87	50	13.8	12.6
B63.06I	6	3000	1.7	5.3	24.4	7200	8.98	28538	30	140	0.16	0.28	0.166	0.88	50	20.6	19.1
B63.08I	8	3000	2.2	7.1	33.1	7200	11.76	29554	30	140	0.16	0.28	0.102	0.64	50	27.5	25.6
B63.10I	10	3000	2.8	8.8	40.5	7200	14.33	29670	35	140	0.16	0.28	0.540	0.62	50	33.0	10.9
4000 min⁻¹ - 96 Volt																	
B63.04I	4	4000	1.4	3.4	17.1	7200	6.10	29432	20	140	0.12	0.21	0.175	0.75	50	20.6	16.4
B63.06I	6	4000	2.1	5.1	24.4	7200	8.98	28538	30	140	0.12	0.21	0.088	0.48	50	33.0	24.5
B63.08I	8	4000	2.8	6.6	33.1	7200	11.76	29554	30	140	0.12	0.21	0.061	0.37	50	41.2	31.8
B63.10I	10	4000	3.4	8.1	40.5	7200	14.33	29670	35	140	0.12	0.21	0.041	0.28	50	55.0	39.0
6000 min⁻¹ - 96 Volt																	
B63.04I	4	6000	1.9	3.0	17.1	7200	6.10	29432	20	140	0.08	0.14	0.074	0.32	50	27.5	21.7
B63.06I	6	6000	2.9	4.6	24.4	7200	8.98	28538	30	140	0.08	0.14	0.037	0.20	50	41.2	33.2
B63.08I	8	6000	3.5	5.6	33.1	7200	11.76	29554	30	140	0.08	0.14	0.029	0.18	50	55.0	40.4
B63.10I	10	6000	4.3	6.8	40.5	7200	14.33	29670	35	140	0.08	0.14	0.019	0.14	50	70.7	49.1
2000 min⁻¹ - 96 Volt																	
B71.12I	12	2000	2.3	11.0	48	7200	23.6	20339	45	140	0.24	0.42	0.107	0.53	50	29.2	26.5
B71.16I	16	2000	2.8	13.5	60	7200	31.5	19029	45	140	0.24	0.42	0.073	0.43	50	37.6	32.5
B71.20I	20	2000	3.4	16.0	80	7200	38.4	20812	50	140	0.24	0.42	0.050	0.33	50	47.8	38.5
B71.24I	24	2000	3.8	18.0	92	7200	45.4	20287	55	140	0.24	0.42	0.037	0.26	50	58.4	43.3
3000 min⁻¹ - 96 Volt																	
B71.12I	12	3000	3.3	10.5	48	7200	23.6	20339	45	140	0.16	0.28	0.047	0.24	50	43.8	37.9
B71.16I	16	3000	3.8	12.0	60	7200	31.5	19029	45	140	0.16	0.28	0.030	0.18	50	58.8	43.3
B71.20I	20	3000	4.2	13.5	80	7200	38.4	20812	50	140	0.16	0.28	0.021	0.13	50	75.1	48.7
B71.24I	24	3000	4.7	15.0	92	7200	45.4	20287	55	140	0.16	0.28	0.017	0.12	50	87.6	54.1


Connection type C5 available for all motor range. Connection type C3 available only for I_o < 66 Arms upon request.

HMC SERIES FOR CONTROLLING HYDRAULIC SYSTEMS

Battery-powered drive (48Vdc) for the control of brushless servomotors coupled to hydraulic pumps on forklifts, automatic forklifts and on any battery-powered equipment that needs a hydraulic, pneumatic or conditioning system.

It's an excellent solution in order to limit expenditures without living up performance.

Current Size		A	B	C	D
Rated Current	Arms	40	75	110	220
Peak Current	Arms	80	150	220	350
Torque (3000 rpm)	Nm	8	16	24	48
Main Power Supply	Vdc			48	
Cooling		Self cooled Internal forced ventilation if requested			
Degree of Protection		IP20			
Operating Temperature	°C	0 ÷ 45°C - up to 60°C decreasing 2% each °C over 45°C			
Storage Temperature	°C	From -25 to +80			
Relative Humidity	%	$\leq 90\%$ without drops			
Weight	Kg	3.2	3.2	3.7	4.2
Dimensions: W x H x D	mm	70 x 242 x 234	70 x 242 x 234	103 x 242 x 234	143 x 242 x 234

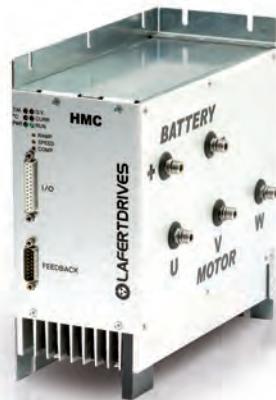

DRIVING DIFFERENCES AMONG THE SEVERAL MOTOR TECHNOLOGIES

Asynchronous Motors	DC Motors with brushes	Brushless Servo Motors
Controlled by inverters	Controlled by on/off contractor	Controlled by HMC
Reduced torque with low speed	Spike, interferences in the field of radiofrequencies	Constant torque 0 → Max with the possibility to carefully adjust the hydraulic circuit
Continuous use of the battery	Continuous use of the battery	No battery consumption when the motor is not working
Start and stop ramp	Sudden change in pressure inside oil conduits	Start and stop ramp carefully controllable
-	Sharp reduction in the battery level on starting with consequent battery deterioration over time	Permanent magnets that ensure higher efficiency while increasing system efficiency
Control through proportional valves that provide the adjustment of the hydraulic circuit	Control through proportional valves that provide the adjustment of the hydraulic circuit	No more proportional valves thanks to the pressure/position feedback control

TWIN SERIES FOR ELECTRIC TRACTION

Dual channel drive in book format designed for battery-power supply (24Vdc, 48Vdc, 96Vdc). Simultaneous control of two motors in speed, torque and position with a single drive. Mathematical synchronisation between the two motors.

Sinusoidal control with integrated power supply and braking resistor group; peak output current up to 350 Arms for channel.

Possibility to connect drive outputs in parallel in order to control high power motors.

Ideal solution for "traction/steering" applications (such as, drive wheels), where two motors have to be controlled in position and when the adjustment of position synchronism between the two motors is directly required inside the drive, in order to carry out extremely accurate paths.

In addition, the Twin series allows controlling two "traction" motors with position synchronism, with electronic differential solutions that allow smooth and comfortable handling even in presence of paths with curves.

Current Size		24/48 Vdc				96 Vdc			
		A	B	C	D	A	B	C	D
Rated Current	Arms	40	75	150	220	30	55	80	115
Peak Current	Arms	80	150	300	350	60	110	160	190
Main Power Supply	Vdc	24/48				96			
Cooling		Internal forced ventilation							
External Brake Resistor	Ω	1 ÷ 5							
Degree of Protection		IP20							
Operating Temperature	°C	0 ÷ 45°C - up to 60°C decreasing 2% each °C over 45°C							
Storage Temperature	°C	From -25 to +80							
Relative Humidity	%	$\leq 90\%$ without drops							
Weight	Kg	6							
Dimensions: W x H x D	mm	285x102x234				*70 Size A			



* Main power supply 24 Vac available on request.

Lafert Servo Motors S.p.A.

E. Majorana, 2/a
I-30020 Novanta di Piave (Venezia), Italy
Tel. +39 / 0421 572 211
Fax +39 / 0421 225 858
info.servomotors@lafert.com

Lafert Servo Drives S.r.l.

E. Mattei, 84/25
I-40138 Bologna, Italy
Tel. +39 / 051 780 294
Fax +39 / 051 781 263
info.servodrives@lafert.com

www.lafert.com**Branches & Partners**

Lafert GmbH
Wolf-Hirth-Straße 10
D-71034 Böblingen
Germany
Phone +49 175 550 4526
lafert.germany@lafert.com

Lafert Electric Motors Ltd.
Unit 17 Orion Way
Crewe, Cheshire CW1 6NG
United Kingdom
Phone +44 / (0) 1270 270 022
lafertuk@lafert.com

Lafert Moteurs S.A.S.
L'Isle d'Abeau Parc de Chesnes
75, rue de Malacombe
F - 38070 St. Quentin-Fallavier
France
Phone +33 / 474 95 41 01
info.lafertmoteurs@lafert.com

Lafert Motores Eléctricos, S.L.
Polígono Pignatelli, Nave 27
E - 50410 Cuarte de Huerva (Zaragoza)
Spain
Phone +34 / 976 503 822
info@lafert.es

Lafert N.A. (North America)
5620 Kennedy Road - Mississauga
Ontario L4Z 2A9
Canada
Phone +1 / 800/661 6413 - 905/629 1939
sales@laferta-na.com

Lafert Electric Motors (Australia)
Factory 3, 117-123 Abbott Road,
Hallam - VIC 3803
Australia
Phone +61 / (0)3 95 46 75 15
info@lafertaust.com.au

Lafert Singapore Pte Ltd
48 Hillview Terrace #06-06
Hillview Building - Singapore 669269
Phone +65 / 67630400 - 67620400
info@lafert.com.sg

Lafert (Suzhou) Co., Ltd.
No.3 Industrial Plant Building Yue Xi Phase 3,
Tian E Dang Lu 2011, 215104 Wuzong
Economic Development Zone, Suzhou
China
Phone +86 / 512 6687 0618
info.lafertsuzhou@lafert.com

